

Tsunami Pump®

your preferred water booster



INTELLIGENT AUTOMATIC Self-Priming JET Pump



-  Low Maintenance
-  Energy Saving
-  Over Heating Protection
-  Strong & Durable
-  Anti - Rust Pump Shell
-  Less Noise Operation




JLM

INTELLIGENT AUTOMATIC SELF-PRIMING JET PUMP

- Automatic cold & hot water turbine self-priming pump.
- Widely used in living water taking, pumping well water, tap water and 100°C hot water. household boosting, garden & farm irrigations, etc.
- Suitable for non-flammable or non-explosive clear water without abrasive (PH 6-8.5) or fiber and not aggressive to stainless steel.
- High-Tech Intelligence Automatic Control System, PCB dry operation protection, water lacking protection, electronic pump starting delay protection, and more protection system of timer, jumper, current, etc.

FEATURES

- All-In-One Controller
- Constant Pressure
- Variable Speed Motor
- Multiple Protection
- Easy Operation
- Energy Saving

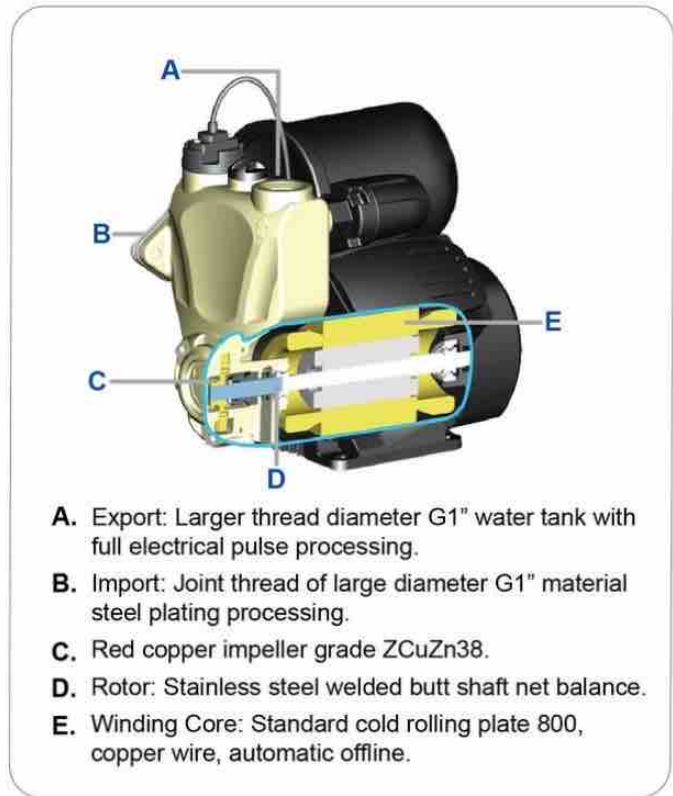

- A.** Export: Larger thread diameter G1" water tank with full electrical pulse processing.
- B.** Import: Joint thread of large diameter G1" material steel plating processing.
- C.** Red copper impeller grade ZCuZn38.
- D.** Rotor: Stainless steel welded butt shaft net balance.
- E.** Winding Core: Standard cold rolling plate 800, copper wire, automatic offline.

WEATHERPROOF COVER

- All-rounder cover for outdoor installation to protect pump from all weather.

SOUNDPROOF BASE

- To provide extra low noise during operation and stable position at all time.



ANTI DRY RUN PROTECTION



5 AUTO RESTART
TIMER MODE
1H / 2H / 5H / 12H / 24H



STAINLESS STEEL INLET & OUTLET

- Anti-rust inlet & outlet to ensure clean and smooth water supply.



PERFORMANCE TABLE

Model	Power (w)	Voltage/ Frequency	Speed (r/min)	Max Flow (m ³ /hr)	Current (A)	Suction (m)	Max Head (m)	Inlet Diameter
JLM-200A	200	230V / 50Hz	2860	2.0	2.0	8	25	1"x1"
JLM-400A	400	230V / 50Hz	2860	2.0	2.7	8	35	1"x1"
JLM-800A	800	230V / 50Hz	2860	3.5	5.2	8	45	1"x1"
JLM-1500A	1500	415V / 50Hz	2860	6.5	8.0	8	60	1.5"x1.5"
JLM-C400A	400	230V / 50Hz	2860	2.5	2.7	8	35	1"x1"